AR8600 Optional battery pack fitting instructions.

[paperwork V1.0, 16.01.2001 © AOR Ltd, 2001 - Ar8600bat.doc]

Remove all power from set.

Remove top cover (8 screws).

Remove inner cover (6 screws along out edges). Remove speaker connecting plug as the cover is lifted.


Remove 4 screws holding battery holder to inner cover.

Fit battery pack into holder with its wires exiting on the left hand side (the wires are long enough to run along side battery pack in the holder to avoid having to sharply bend them against the battery holder).
Re-assemble back onto inner cover.
Take care not to trap any wires when doing this.

Re-fit inner cover back to the set plugging in the speaker connection back into socket J107 and battery pack to J119.

Test battery pack operation.

Re-fit top cover.

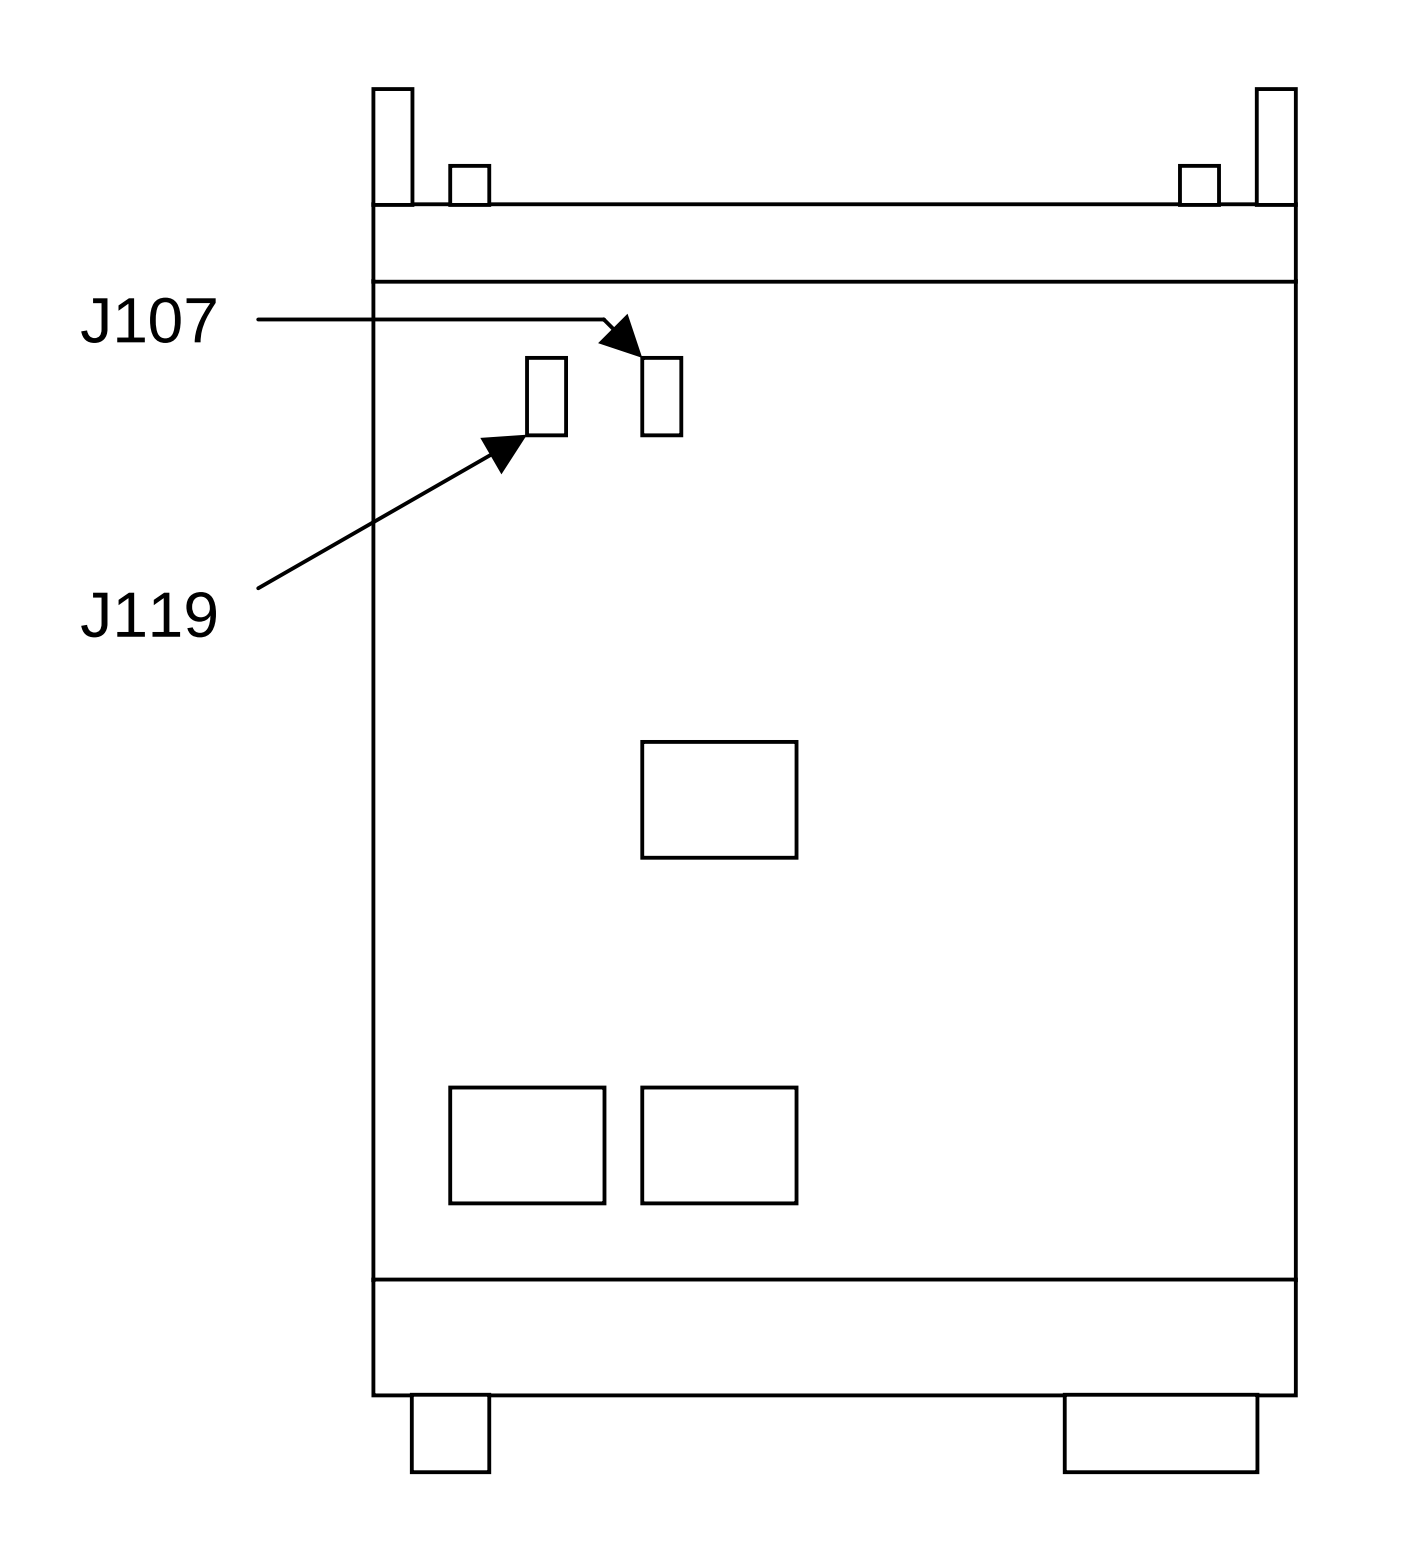

AR8600 top view